



Crosspanol Industries Limited

Traf Floor, Plot No. 68, Sector 44, Gurugram 122003, Haryana.

T +91-124-4784800 | F +91-124-4784699 | E info@greenpanel.com

Toll Free No. 1800-102-2999 (Monday to Friday except holidays 10 am to 5 pm)

Pand (Fifter Mokum Bond, Tiperikia 78475, Accept holidays 10 cm to 5 pm)

www.greenpanel.com







ABOUT GREENPANEL

Greenpanel Industries Limited is India's largest manufacturer of wood panels.

Our product range of MDF, Plywood, Flooring, Veneers & Doors is marketed and distributed through our robust network of over 3,000 dealers pan India.

Greenpanel Floorin

With a new brand and vision, we are committed to usher in a new generation of wood solutions which include ou hallmark flooring range. Our team has carefully studied the latest International trends in flooring and curated it under the Prima and Persona collection.



NO OC

BRAND VISION & KEY MILESTONES

LUXURY IN THE LAP OF NATURE

THE NEW FLOORING TRENDS

THE GREENPANEL FLOORING ADVANTAGE

PERMACLICK™ THE MOST SUPERIOR LOCKING SYSTEM

KNOW GREENPANEL FLOORING BETTER

PRIMA COLLECTION

PERSONA COLLECTION

MAINTENANCE & CADE

INSTALLATION PROCES

ACCESSORIES

WADDANT








BRAND VISION

Every organisation in this world irrespective of size and domain works towards building a prosperous future for itself. We believe that the key to do so is by innovating products and exceeding customer satisfaction.

We at Greenpanel, envision the future of contemporary

We pride ourselves in coming up with innovations which help us in achieving our company's vision: To represent the infinite future possibilities in wood panelling.

Our logo is the perfect depiction of these infinite possibilities with a seamless merging of G S P to form an infinity symbol.

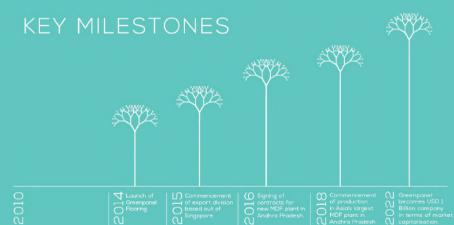

LUXURY IN THE LAP OF NATURE

Don't you love reminiscing amidst lush forests and birds chirping?

Oh wait But you're at home Sigh

But what if we say our flooring solutions can make you feel that way. Quite a beautiful thought isn't it?

With Greenpanel flooring,
it's like living in the lap of nature.
Our Flooring is not just durable, it is eco-friendly to
Plus they make a style statement
in every home they adorn.







THE NEW FLOORING TRENDSEMBRACING NATURE!

As we get more and more attened to the modern and monotonous nature of urban life we long more for the beauty and pleasure of living amidst nature. Adopting nature and natural living practices is becoming a fast way of life internationally and its catching up in India as well.

Wooden floors with their withered, natural look lend authenticity and harmony to living spaces. The style and appearance of your room is determined by the colour of your floor. Different shades of wood can match different tastes and personalities.

Real natural tones in Greenpanel flooring add timelessness.

Lighter shades stand for extra spacious look and feel,
warm shades for cosiness and darker shades for
a dash of luxury.





THE GREENPANEL FLOORING


















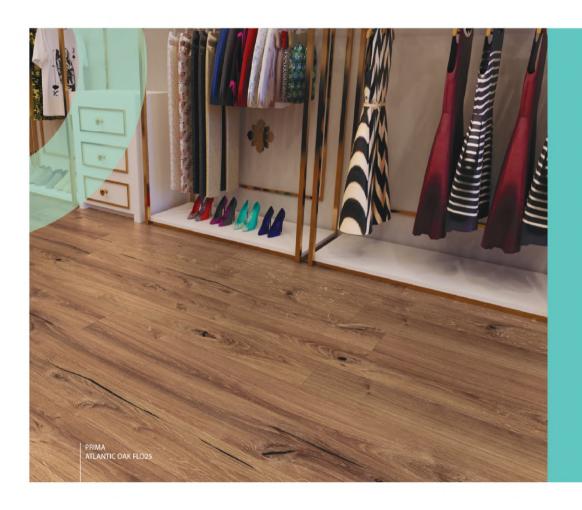

PERMACLICKTM THE MOST SUPERIOR CLICK LOCK SYSTEM

Unlike many floors, Greenpanel flooring do not have beveled edges or a V-Groove, but a 90-degree edge between two planks

Due to imperfections in the manufacturing process of unlicensed interlocking systems made by other manufacturers, two adjaining wood planks do not sit level and are at different heights.

This results in the edge of one plank being higher that that of its adjoining plank (FIG.1).

In such a situation, a 90 - degree angle results in a very sharp edge, creating risk of injury when walking barefoot or there is a risk of tripping.

Due to the unique Permaclick!* Interlocking system of Greenpanel Flooring, the edges are always in level.

There are no surface imperfections or edges sticking

90 - DEGREE EDGE

High abrasion resistance overlay

Decorative design layer

Decorative design layer

Decorative design layer

Decorative design layer

IMPERFECT SURFACE (FIG.)



PERFECT SURFACE (FIG.2)



To overcome imperfection of the profile, the edges are beveled or shaped in a V-Groove to provide a gentler angle between the planks (FIG.3).

The process of beveling or V-Grooving involves trimming of each 90 - degree edge, resulting in the removal of the high-abrasive resistant layer and the decorative design layer which exposes the inner HDF core of the flooring (FIG.3). Since the protective layers get removed, this makes the HDF core highly susceptible to water ingress as well as accumulation of dirt.

Greenpanel Flooring have a unique angle snap method o layout that fits the planks together at 90 - degree angle

This means Greenpanel flooring have 90 - degree edges that are safe, locked together with no portion of inner HDF core exposed. As a result, the floor is highly resistant to water ingress and dust accumulation.



Exposed HDF Core



The tensile strength of the click system seals off the floor with an air tight finish that doesn't let liquid seep in and provides superior protection against moisture. As a result, our floors are more durable with minimal wear and tear





CHOOSE YOUR GRADE



Re

Recommended for residential and low footfall areas.



AC

Recommended for residential, office spaces and light commercial applications.



ACE

Recommended for medium to heavy duty commercial applications.


CHOOSE YOUR TEXTURE





CROWN
Curvy Dynamic Effect

PRODUCT STRUCTURE



TOP LAYE

High abrasion resistance overlay

SECOND LAYER


Decorative design layer


MIDDLE LAVE


100% HDF


BASE LAYE

Moisture resistar backing layer

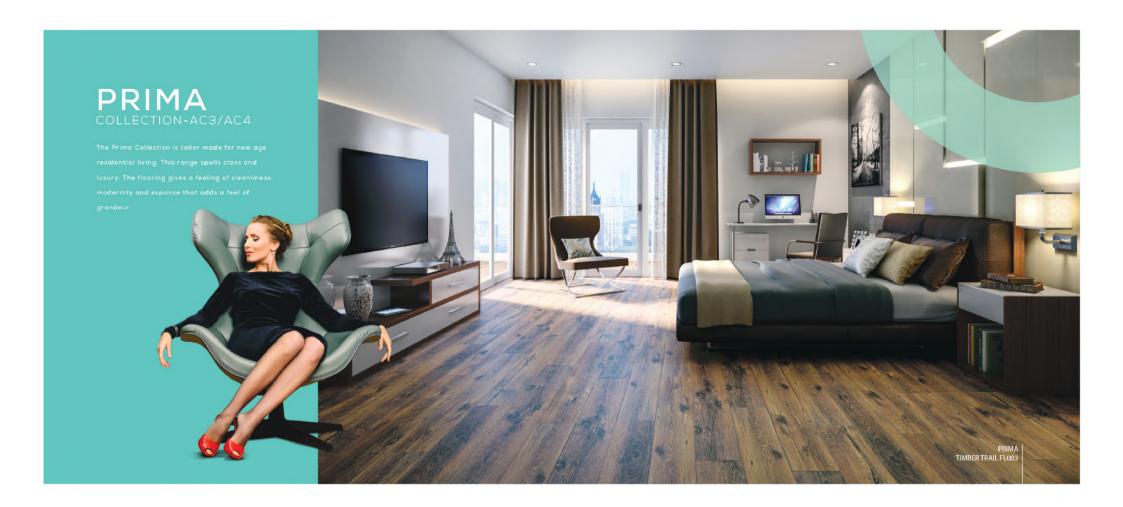

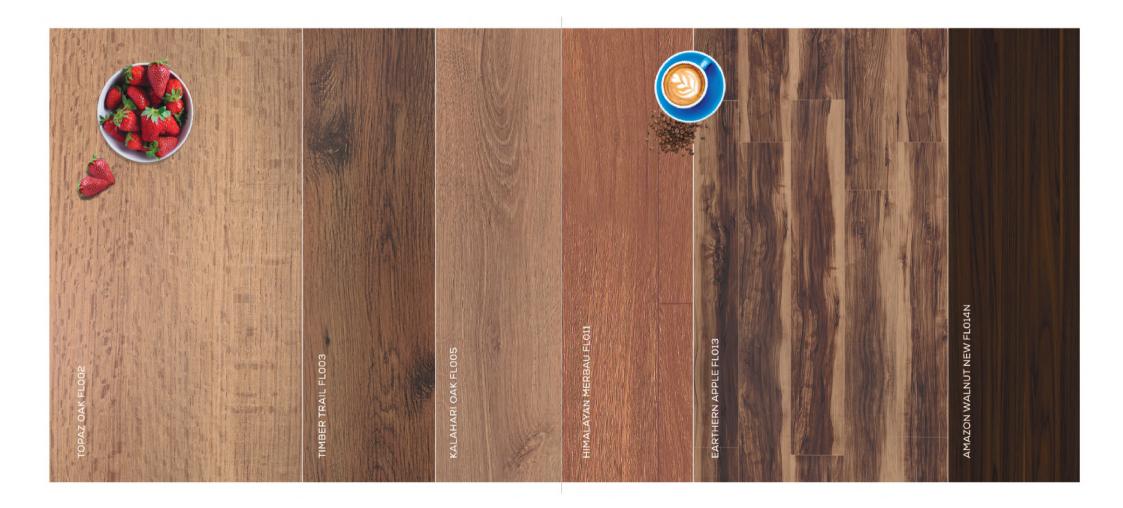

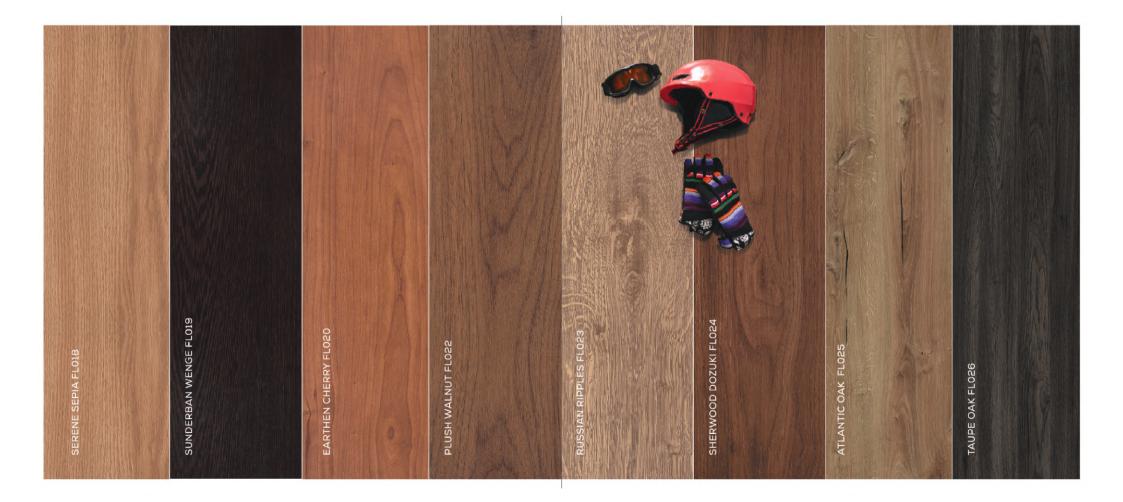


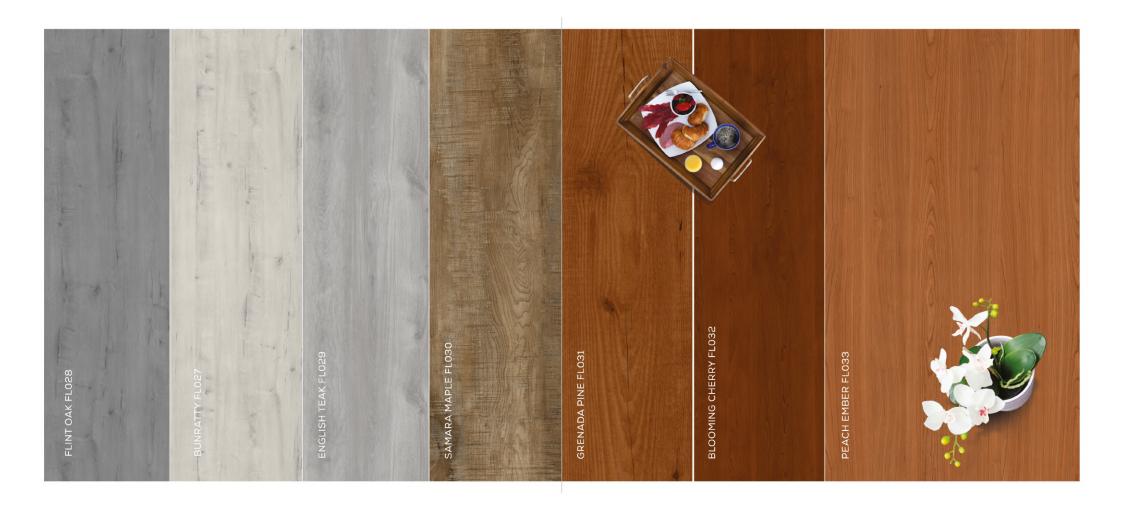








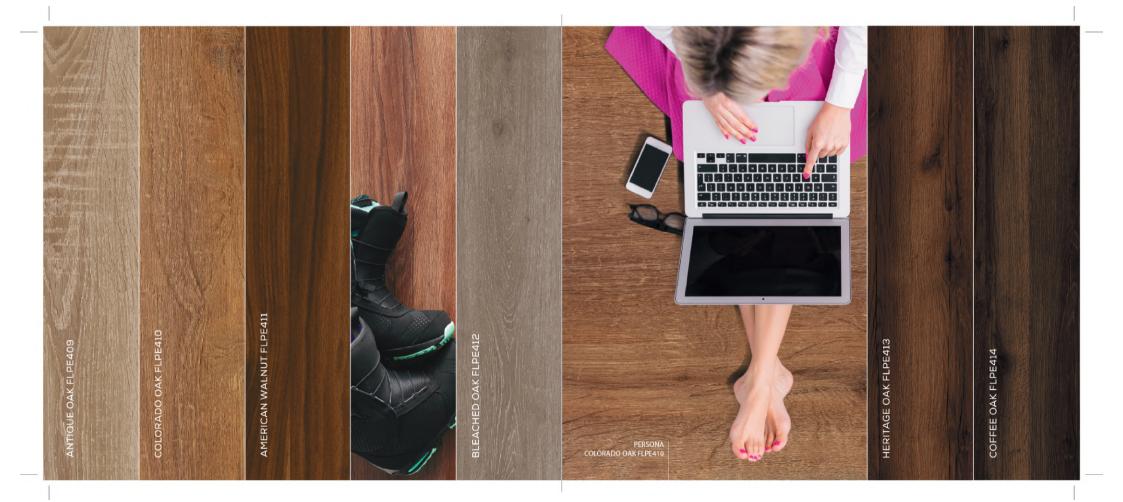

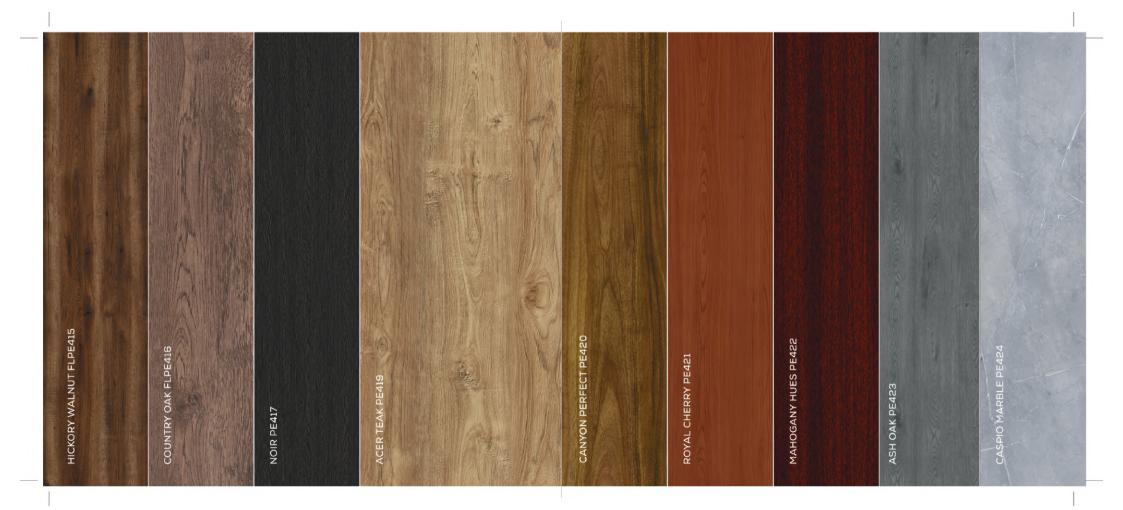

MAINTENANCE & CARE

Greenpanel flooring is easy to clean and maintain. The laminated top laye on the planks makes it spick and span year after year. These floors don't need any special cleaning agents or methods, just a squeezed out damp mop will do.



Sweep the floor using a standard dust mop to remove dirt and dust



to use wax,
polish,
oil or
varnish
on the floor



When necessary wipe the floor with a squeezed out damp cloth, using only water



Do not use soap-based detergents or house hold cleaners to clean the floor



Do not use abrasive cleaners on the floor.



In case
something spills
simply wipe
the floor
with a dry cloth




Use felt pads/rubber feet under furniture legs to avoid scratching



Entry mats help in collecting sand, dirt, grit and other substances that may harm your floor



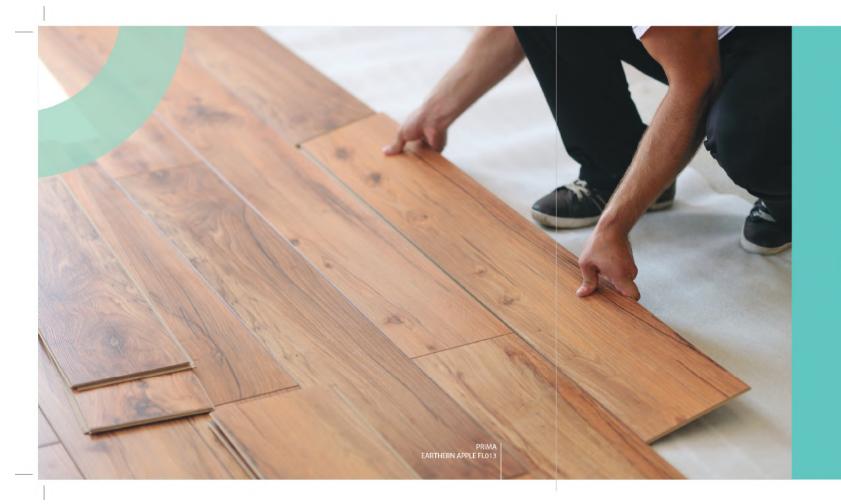

INSTALLATION PROCESS

Laying Greenpanel flooring is extremely easy with the unique Permaclick[™] technology.

Easy Installation

Greenpanel flooring has the unique Permaclick™ interlocking system which ensures that the plank effortlessly click together.

Easy to install on existing floor

Greenpanel flooring can be laid over any type of subfloor like concrete, stone, vinyl or ceramic as long as it is clean and dry



THE BEST ACCESSORIES TO GO WITH

Add the perfect finishing touch with Greenpanel flooring skirting and profiles. To complete the look of your stunning floor, you can choose from a wide range of designs that match every floor and style

UNDERLAY

Greenpanel premium 2-in-1 underlay is a combination of a 2 mm underlay and a PE foil. With the ease of just rolling out the underlay, you can level the subfloor irregularity, as well as reduce the risk of transferring humidity from the subfloor to the floor pages.


SKIRTING

Provides finish to the floors by cladding the lower part of the adjoining walls.



STAIR NOSE

Covers the open edges of the floor planks and provides seamless transition between the horizontal and vertical sections of the staircase



T-PROFILE


Connects two sections of the floor at the same height



REDUCER

Provides a smooth transition from the floor to a ower surface such as tiled Floor or carpet





BEADING

Creates a border between the floor and adjoining walls Can be used as an alternate to skirting where skirting is not used

GREENPANEL FLOORING WARRANTY

Greenpanel flooring is a high quality product manufactured by Greenpanel Industries Limited Our quality standards are backed by extensive warranty coverage. Greenpanel flooring is designed to provide many years of resistance to foot traffic friction without showing signs of significant wear and tear. This is under the conditions provided that no abrasive substances (salt, sand and glass) are present on the surface, the floor has been installed according to Greenpanel Industries Limited guidelines and the floor has been regularly maintained according to the manufacturer's instructions. See maintenance and care guidelines.

LAMINATE FLOORING

On fulfilment of the below conditions, Greenpanel Industries Limited grants the following warranty on its Greenpanel Flooring

Prima collection - 10 years
Persona collection - 15 years



THE WARRANTY COVERS THE FOLLOWING:

Stain Resistance

ireenpanel flooring is resistant to normal household stains on the decorative surface. The floor will not stain due to spills from beverages, when removed and cleaned promotiv and properly.

Fade Resistance

Greenpanel flooring is resistant to fading from expasure to indirect sunlight o normal artificial light with the exception of natural ageing.

Wear Resistance

With respect to claims on surface wear-through, an area on the floor panel is considered worn out only if the surface wear is readily visible (le approximate) 9.7 square cm) and the decorative layer has been exhausted until the core material is visible Claims for surface wear-through are unacceptable if the surface wear-through occurs at the edges/joints of the panel Gloss reduction is not considered to be surface worn-through.

General Warranty Conditions

The warranty does not cover damage due to transportation, storage, installation, extreme indoor conditions (excessive dryness or humidity), pets, insects, water, negligence, or any other similar cause. The warranty covers only defective products exceeding 5% in m2 of the total quantity purchased by the customer (excluding losses resulting from cutting boards during installation).

Obligations by Greenpanel Industries Limited

Under the terms of this warranty, the responsibility of the manufacturer,
Greenpanel Industries Limited, is limited to any of the following measures, at
Greenpanel's sole discretion and without any other form of compensation
- Supply the material necessary to replace the defective boards
- Pay compensation equivalent to the purchase cost of the defective boards

Pay compensation equivalent to the purchase cost of the defective boards
 For complete information on warranty, please visit our website www.gpwoodfloors.com